

FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

Narrow Tractors - 5310N and 5510N Tractors (North America Edition)




**CAB
AIR FILTER**
[AL225554](#)
Replace as required.



**ENGINE
FUEL FILTER**
[RE60021](#)
Replace after every 500 hours.



**ENGINE
OIL FILTER**
[T19044](#) (5310N)
[RE59754](#) (5510N)
Replace initially after 100 hours and every 250 hours and annually.
(Click here for [capacity](#))

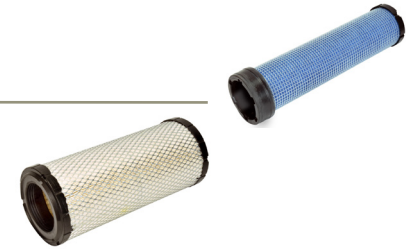

**ENGINE
PRIMARY AIR FILTER**
[AT171853](#)
SECONDARY AIR FILTER
[AT171854](#)
Replace both primary and secondary filters after cleaning primary filter for 6 times or at least once a year.



**HYDRAULIC
OIL FILTER – [RE45864](#)**
Replace initially after 100 hours and after every 250 hours.
(Click here for [capacity](#))



CAPACITIES

Narrow Tractors - 5310N and 5510N Tractors (North America Edition)

CAPACITIES (Approximate):

Fuel Tank:

..... 60 L (16 gal)

Cooling System:

Cool-Gard™ II

5310N 9.5 L (2.5 gal)

5510N 10.8 L (2.85 gal)

Engine Crankcase W/ Filter:

..... 8.5 L (2.25 gal)

Transmission and Hydraulic System:

Hy-Gard™

..... 41.8 L (11 gal)

Mechanical Front Wheel Drive (MFWD):

Axle Housing 5 L (1.32 gal)

Wheel Hubs 0.5 L (0.132 gal)

[Return to Filter Overview](#)

